


WARTHOG ROTOR MATCHING SYSTEM // BID SPEC SHEET



Pro-Cut's PFM lathes are the first choice of the brake service industry. They have been approved by virtually every auto manufacturer and are essential equipment for GM, Ford, and Nissan dealers in North America.

WARTHOG RMS // FEATURES

The Warthog Rotor Matching System provides smooth, non-directional finish in a single pass, removing up to 0.040" per cut. On-vehicle function eliminates time-consuming removal of pressed-on or trapped rotors. Powerful motor turns 4x4 hubs easily. Cast aluminum body provides natural dampening and is virtually indestructible. Extra wide adjustment range handles over-sized rotors with no problem. Rigid tool arms ensure that rotor surfaces will be parallel and perpendicular to spindle axis. Simple, easy-to-use adapters mount quickly. Automatic shut-off feature allows hands-free operation. New features include a heavy duty trolley with up to 23" of vertical travel, direct placement chip tray, and disc brake locking mechanism. Adapter packages available from 3 lug Smart cars up through many medium duty buses and trucks.

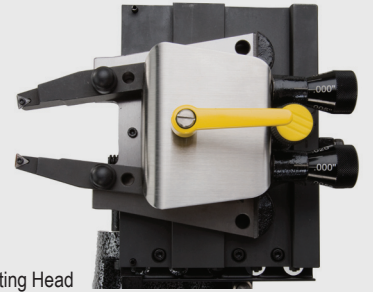

SPEEDLOCK Cutting Head

WARTHOG RMS // FUNCTION

The Warthog Rotor Matching System mounts on the vehicle hub and resurfaces the brake rotor. The machine's patented computerized compensation system eliminates run-out to less than .001" and effectively matches the rotor to the hub. The elimination of run-out in the rotor eliminates brake shudder or pulsation and extends the life of rotors and pads. The fully patented PFM adjustment system is the only fully automatic compensation system on the market and requires no input from the tech.

PERFORMANCE SPECS

	USA	Foreign
Maximum Rotor Thickness	1.75"	44 mm
Minimum Rotor Thickness	0.2"	5 mm
Maximum Rotor Diameter	17.6"	447 mm
Minimum Rotor Diameter	4.0"	102 mm
Maximum Depth of Cut	0.020"/side	0.508 mm
Spindle Speed	115 rpm	115 rpm
Carriage Speed	0.005"/rev	0.12 mm/rev
Motor	1.0 hp	0.75 kW
Weight	108 lbs	49 kgs
Shipping Weight	240 lbs	109 kgs
Electrical Supply	110v/1ph/60hz	230v/1ph/50hz
Feed Distance	6.7" (7.5"Opt.)	170mm (190mmOpt.)
Start-up Torque	73 ft. lbs.	99 N-m
Working Height Range	22"-45"	559-1143mm

FEATURE CHECKLIST

Warthog Lathe	⊗	⊗
Cutting tips (box of 10)	⊗	⊗
Trolley	⊗	⊗
Silencer	⊗	⊗
Nut & Bolt Kit	⊗	⊗
Performance Tool Kit	⊗	⊗
50-687 4 lug car adapter	⊗	⊗
50-688 5 lug car adapter	⊗	⊗
50-695 Lt PU adapter	⊗	⊗
50-691 SUV/PU adapter	⊗	⊗
50-681 1/2 Ton Truck adapter	⊗	⊗
50-694 Ford Truck adapter	⊗	⊗
50-683 HD PU adapter		⊗
50-935 Dual PU adapter		⊗

6 Adapter pkg. 8 Adapter pkg.

MANUFACTURED BY:

PRO-CUT USA

10 TECHNOLOGY DRIVE
WEST LEBANON, NH 03784 USA

P» 603-298-5200

F» 603-298-8404

INFO@PROCUTUSA.COM

WWW.PROCUTUSA.COM

